BMR 351XX02/002

1600W digital quarter brick DC/DC IBC

The BMR351 XX02/002 is a high-power digital DC/DC converter. The impressive performance of this converter includes an efficiency reaching 97.8% at 54V_{in} at half load. The BMR351 XX02/002 is a non-isolated quarter brick. The converter delivers a fully regulated 12.20V, with a continuous power level of 1600W and has a peak power capability of up to 2320W for limited time.

This converter is designed for through-hole mounting using wave solder or pin-in-paste production, and incorporates a novel design of baseplate, which optimizes thermal performance while minimizing height.

Key features

- High efficiency with 97.8%
- Non-isolated
- 12.20 V fully regulated
- Event data recorder (black-box)
- Parallel Operation with Droop load share
- Screwed baseplate
- Monotonic start-up
- Output over voltage protection
- Over temperature protection
- Output short-circuit protection
- Remote control
- PMBus configuration

Soldering methods

- Reflow soldering pin-in-paste
- Wave soldering
- Manual soldering

Key electrical information

Parameter	Values
Input range	40-60 V
Output voltage	12.20 V
Output current	136 A
Peak current	200 A
Output power	1600 W
Peak power	2320 W

Mechanical

58.4 x 36.8 x 14.7 mm / 2.30 x 1.45 x 0.58 in

Application areas

- Datacom applications

Product options

The table below describes the different product options.

Example:	BMR351	2	2	02	/002	H	Definitions
Product family	BMR351						
Pin length options		2					0 = 5.33 mm / 0.21 in 2 = 3.69 mm / 0.15 in 3 = 4.57 mm / 0.18 in 4 = 2.79 mm / 0.11 in
Baseplate / HS option			2				0 = Open frame, 14.2 mm / 0.559 in height 2 = Baseplate closed deck, 14.7 mm / 0.58 in height
Other hardware options				02			02 = 7-pin digital header, Sense ±
Configuration code					/002		/002 = 12.20V_{out} DLS configuration for 40-60V_{in}
Packaging options						H	E = soft tray, dry pack (PIP reflow soldering) H* = hard tray, dry pack (PIP reflow soldering) blank = foam tray (no dry pack, wave soldering) * hard tray only available for baseplate version

For more information, please refer to Part 3 Mechanical information.

If you do not find the variant you are looking for, please contact us at Flex Power Modules .

Order number examples

Part number	V_{in}	Outputs	Configuration
BMR3512202/002H	40-60V	12.20V / 136A / 1600W	3.69 mm pins / 7-pin digital header, Sense ± / base late closed deck/ DLS / dry pack, hard tray

Part 1: Electrical specifications

Absolute maximum ratings

Stress in excess of our defined *absolute maximum ratings* may cause permanent damage to the converter. Absolute maximum ratings, also referred to as *non-destructive limits,* are normally tested with one parameter at a time exceeding the limits in the electrical specification.

Characteristics	min	typ	max	Unit
Operating temperature (T_{P1})	-40		+125	°C
Storage temperature	-55		+125	°C
Input voltage (V_{in})	-0.5		+65	V
Input voltage transient (100 ms)			+80	V
Isolation voltage (input to output)			0	V
Isolation voltage (baseplate to output)			0	V
Remote control pin voltage	-0.3		5	V

Reliability

Failure rate (λ) and mean time between failures (MTBF= 1/ λ) are calculated based on *Telcordia SR-332 Issue 4: Method 1, Case 3, (80% of I_{out_TDP}, T_{P1}=40°C, Airflow=200 LFM).*

	Mean	90% confidence level	Unit
Steady-state failure rate (λ)	131	159	nfailures/h
Standard deviation (σ)	22.4		nfailures/h
MTBF	7.65	6.28	MHr

Typical application diagram

Capacitor values are defined in the Electrical Specification tables. The EMI filter is defined in the EMC Part 2.

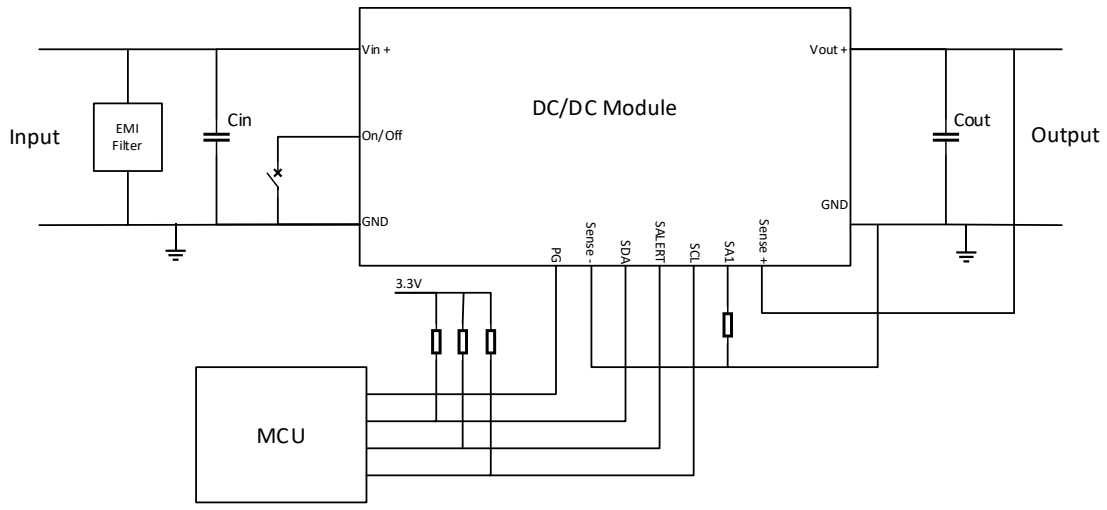

Electrical specifications for BMR351 XX02/002

12.20V, 136A (200A) ≤ 1600W (2320W)

Min and Max values are valid for: T_{P1} = -30 to +90°C, V_{in}= 40V to 60V, unless otherwise specified under conditions. Typical values given at: T_{P1} = +25°C, V_{in}= 54V, max P_{out_TDP}, unless otherwise specified under conditions, see Note 1.

Additional external C_{in} = 220µF, C_{out}= 4mF

Characteristic	conditions	minimum	typical	maximum	unit
Key features					
Efficiency (η)	50% of P_{out_TDP}		97.8		%
	100% of P_{out_TDP}		96.9		%
	50% of P_{out_TDP} V_{in} = 48 V		97.9		%
	100% of P_{out_TDP} V_{in} = 48 V		96.9		%
P_{out_TDP} thermal design power (TDP)	See Note 1			1600	W
P_{out_MAX} peak power (t ≤0,5s)	See Note 1			2320	W
Power dissipation	100% of P_{out_TDP}		51	70	W
Switching frequency (f_s)	0-100 % of P_{out_TDP}		150		kHz
Recommend capacitive load	See Note 2	4000		30000	µF
Input characteristics					
Input voltage range (V_{in})		40		60	V
Input idling power	P_{out} = 0 W		5.5	13	W
Input standby power	(turned off with RC)		552	768	mW
Input OVP			85		V
Internal input capacitance			90		µF
Recommended external input capacitance	See Note 3	220			µF

Note 1: Max. output current is rated at 136A. Max continuous power (thermal design power (TDP) is ≤ 1600W depending on thermal conditions.

Note 2: Minimum 4000uF OS-CON capacitor.

Note 3: Recomended to use 2x100µF electrolyte capacitor + 1x27µF OS-CON capacitor.

Electrical specifications for BMR351 XX02/002

12.20V, 136A (200A) ≤ 1600W (2320W)

Min and Max values are valid for: T_{P1} = -30 to +90°C, V_{in}= 40V to 60V, unless otherwise specified under conditions. Typical values given at: T_{P1} = +25°C, V_{in}= 54V, max P_{out_TDP}, unless otherwise specified under conditions, see Note 1.

Additional external C_{in} = 220µF, C_{out}= 4mF

Characteristic	conditions	minimum	typical	maximum	unit
Output characteristics					
Output voltage initial setting and accuracy	P_{out} = 0 W	12.17	12.20	12.23	V
Output voltage tolerance band	0 – 100% of max P_{out_TDP} V_{in} = 40-60 V	11.5		12.4	V
Output adjust range	0-100% of max P_{out_TDP}	8		13.2	V
Idling voltage	P_{out} = 0 W, 54 V	11.97		12.39	V
Line regulation	V_{in} = 40 - 60 V 0 – 100% of max P_{out_TDP}		5	70	mV
Load regulation	0 - 100% of max P_{out_TDP}		400	480	mV
Output current (I_{out})	V_{in} = 40 - 60 V	0		136	A
Load transient voltage deviation	Load step 25-75-25% of max P_{out_TDP} di/dt = 2.5 A/µs. See Note 2		±220	±468	mV
Load transient recovery time			100		µs
Output ripple & noise	max P_{out_TDP} See Note 3		16	40	mV_{p-p}

Note 1: Max. output current is rated at 136A. Max continuous power (thermal design power (TDP) is ≤ 1600W depending on thermal conditions.
Note 2: C_{out} is 4x1mF
Note 3: See Technical Reference doc: Design considerations

Electrical specifications for BMR351 XX02/002

12.20V, 136A (200A) ≤ 1600W (2320W)

Characteristic	conditions	minimum	typical	maximum	unit
On/off control					
Turn-off input voltage	Decreasing input voltage	34	35	36	V
Turn-on input voltage	Increasing input voltage	36	37	38	V
Ramp-up time (from 0−100% of V_{out})		7	10	13	ms
Start-up time (from V_{in} connection to 90% of V_{out})			40		ms
RC start-up time			25		ms
Logic high: trigger level			1.4		V
Logic low: trigger level			1.3		V
Logic low: response time		0.1	0.2	0.3	ms
Sink current		0.4			mA
Protection features					
Current limit threshold (OCP)	T_{P1} < max T_{P1}	200	220	240	A
Output current limit (OCP) response time and type	Disable and do not retry		28		µs
Current limit threshold (Slow OCP)			163		A
Current limit Off Delay (Slow OCP)	Load step 136-170A. See note 1			200	ms
	Load step 136-200A. See note 1			70	ms
Output overvoltage protection (OVP)			14.2		V
Output overvoltage protection (OVP) response time and type	Disabled until fault cleared		70		µs
Over temperature protection (OTP)	See note 2		125		°C
Over temperature protection (OTP) re-start temperature and type	Disabled until fault cleared		90		°C

Note 1: Off Delay is dependent on averaging power level above TDP, 136A. Product is configured to allow 200A/2320W for max 500ms. High di/dt on load step up to peak power, might cause current overshot resulting in OCP fault. See Technical Reference Document Design & Application Guidelines for detailed information.

Note 2: Please attach thermocouple on NTC resistor to test OTP function, the hot spot (P1) temperature is just for reference.

Electrical specifications for BMR351 XX02/002

12.20V, 136A (200A) ≤ 1600W (2320W)

In the table below all PMBus are written in capital letters.

T_{P1} = -30 to +90°C, V_{in} = 40V to 60V, unless otherwise specified under conditions.
Typical values given at: T_{P1} = +25°C, V_{in} = 54V, max P_{out_TDP}, unless otherwise specified under conditions

Command	Conditions	minimum	typical	maximum	Unit
Monitoring accuracy					
Input voltage READ_VIN			±125		mV
Output voltage READ_VOUT			±40		mV
Output current READ_IOUT	T_{P1} = 25 °C, V_O = 12 V		±1		A
	T_{P1} = -20-120 °C, V_O = 12 V		±5		A
Duty cycle READ_DUTY_CYCLE	No tolerance, Read value is the actual value applied by PWM controller				
Temperature READ_TEMPERATURE_1	Temperature sensor, -20-120 °C		±5		°C

For more detailed information please refer to Technical Reference Document: PMBus commands.

This product is supported by the Flex Power Designer tool.

Electrical graphs for BMR351 XX02/002

12.20V, 136A (200A) ≤ 1600W (2320W)

Efficiency

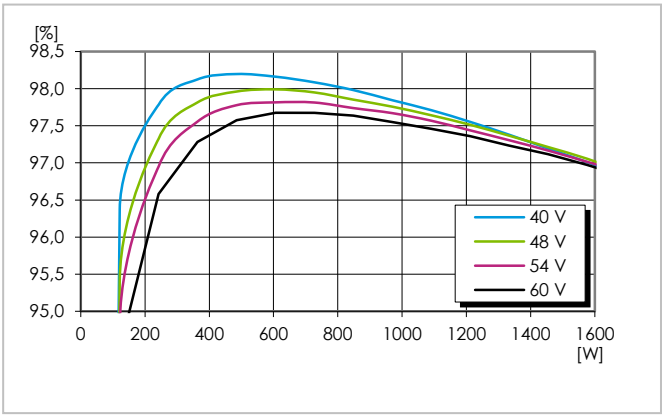

Efficiency vs. output power and input voltage at T_{P1} = +25°

Power dissipation

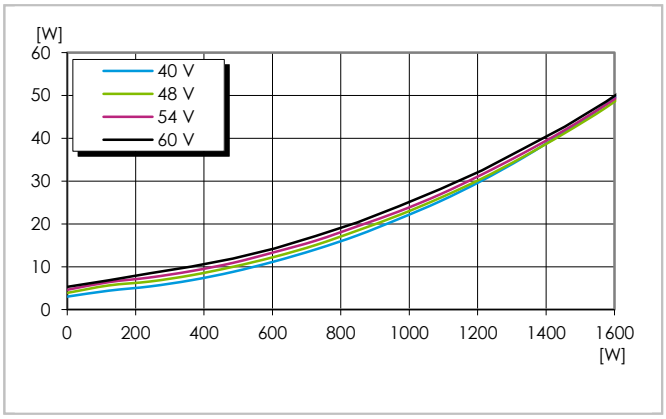

Dissipated power vs. output power at T_{P1} = +25°C

Line regulation

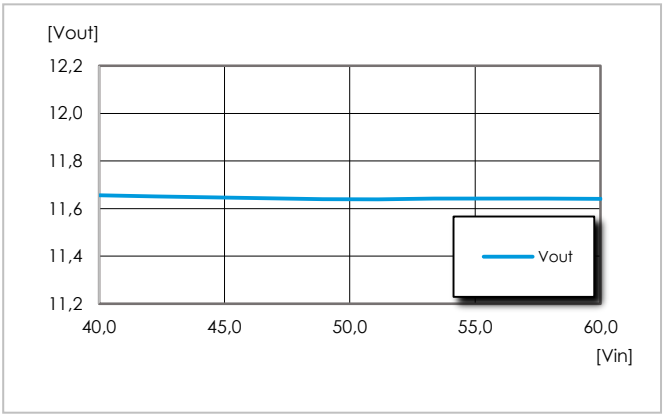

Output voltage vs. input voltage at T_{P1} = +90°C, 100% of max Pout_TDP

Available power

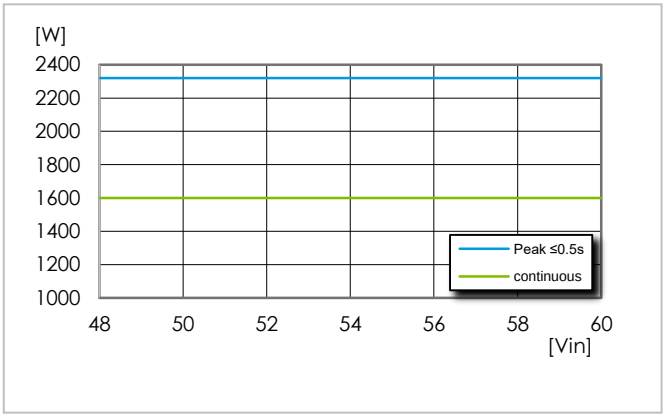

Available output power vs. input voltage , T_{P1} = +90°C

Power loss at max temperature

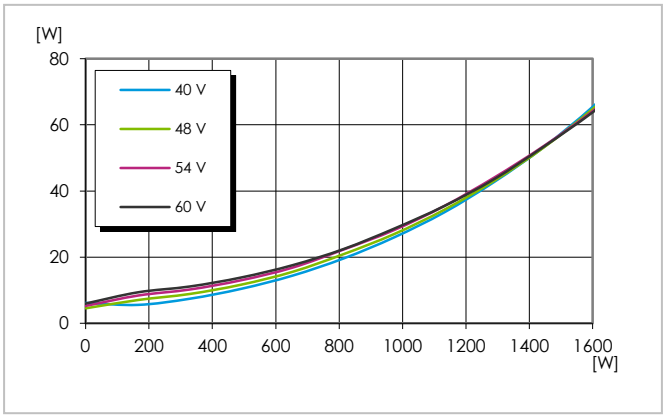

Dissipated power vs. output power and input voltage at T_{P1} = +90°C. Above 1600W only peak t ≤ 0,5s

Output voltage adjust range

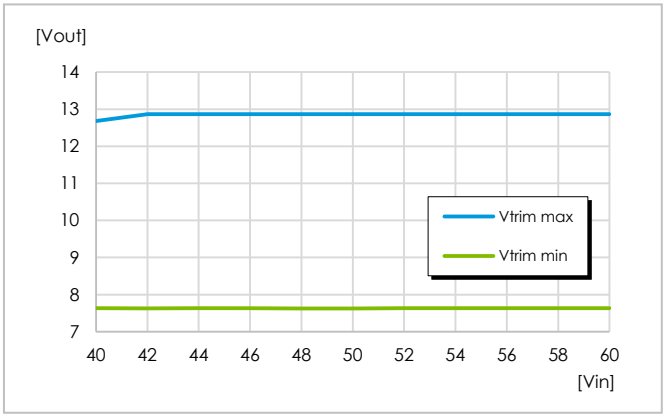

Max and min V_{out} trim vs $V_{in.}$ At Pout_TDP, 1600W.

Part 2: EMC

EMC specifications

Conducted EMI measured according to EN55022 / EN55032, CISPR 22 / CISPR 32 and FCC part 15J (see test set-up below). The fundamental switching frequency is 150kHz for BMR351. The EMI characteristics below is measured at V_{in} = 54V and max I_{out}.

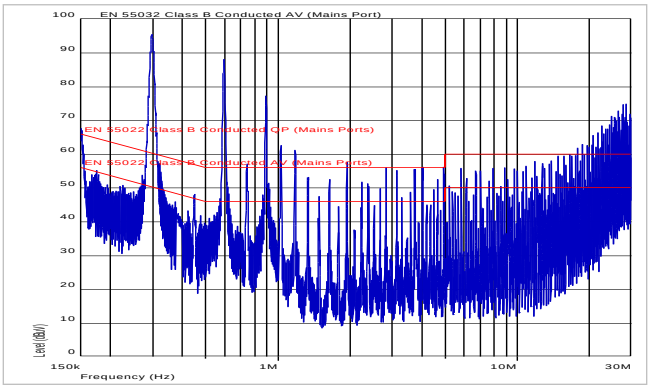

EMI without filter. EN55032 test method and limits are the same as EN55022. 1000µF + 470uF 100V input capacitor and 4000µF 16V OS-CON output capacitor used

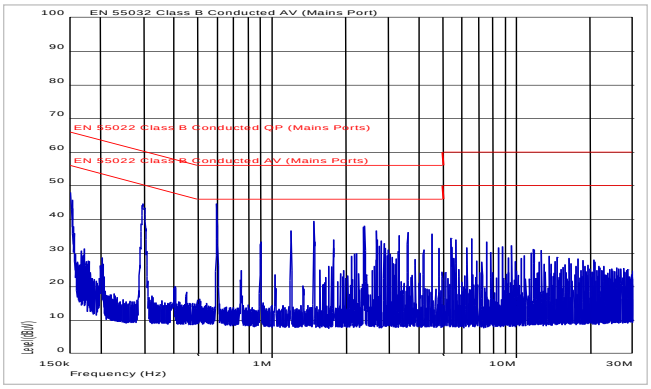

EMI with filter, EN55032 test methods and limits are the same as EN55022

Optional external filter for Class B

Suggested external input filter in order to meet Class B in EN 55022 / EN 55032, CISPR 22 / CISPR 32 and FCC part 15J.

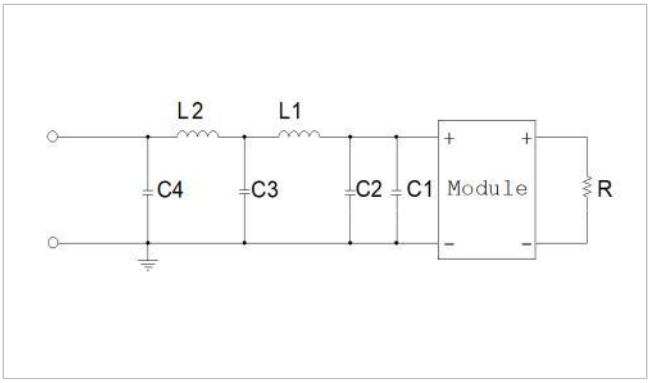

Filter components:
C1 = 1000µF + 470µF (electrolyte)
C2 = 2 x 2.2µF + 10µF
C3 = 2 x 10µF
C4 = 10µF
L1 = 2.2µH
L2 = 2.2µH

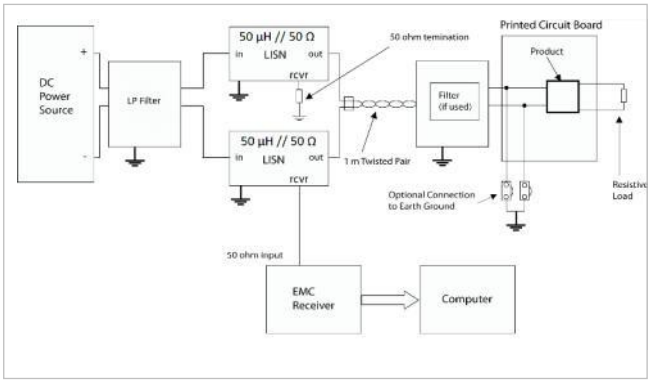

Test set-up

Layout recommendations

The radiated EMI performance of the product will depend on the PWB layout and ground layer design. It is also important to consider the stand-off of the product. If a ground layer is used, it should be connected to the output of the product and the equipment ground or chassis.
A ground layer will increase the stray capacitance in the PWB and improve the high frequency EMC performance.

Part 3: Mechanical information

BMR351 X2XX/XXX: hole mounted, baseplate version

The mechanical information is based on a module which is hole mounted and has a baseplate.

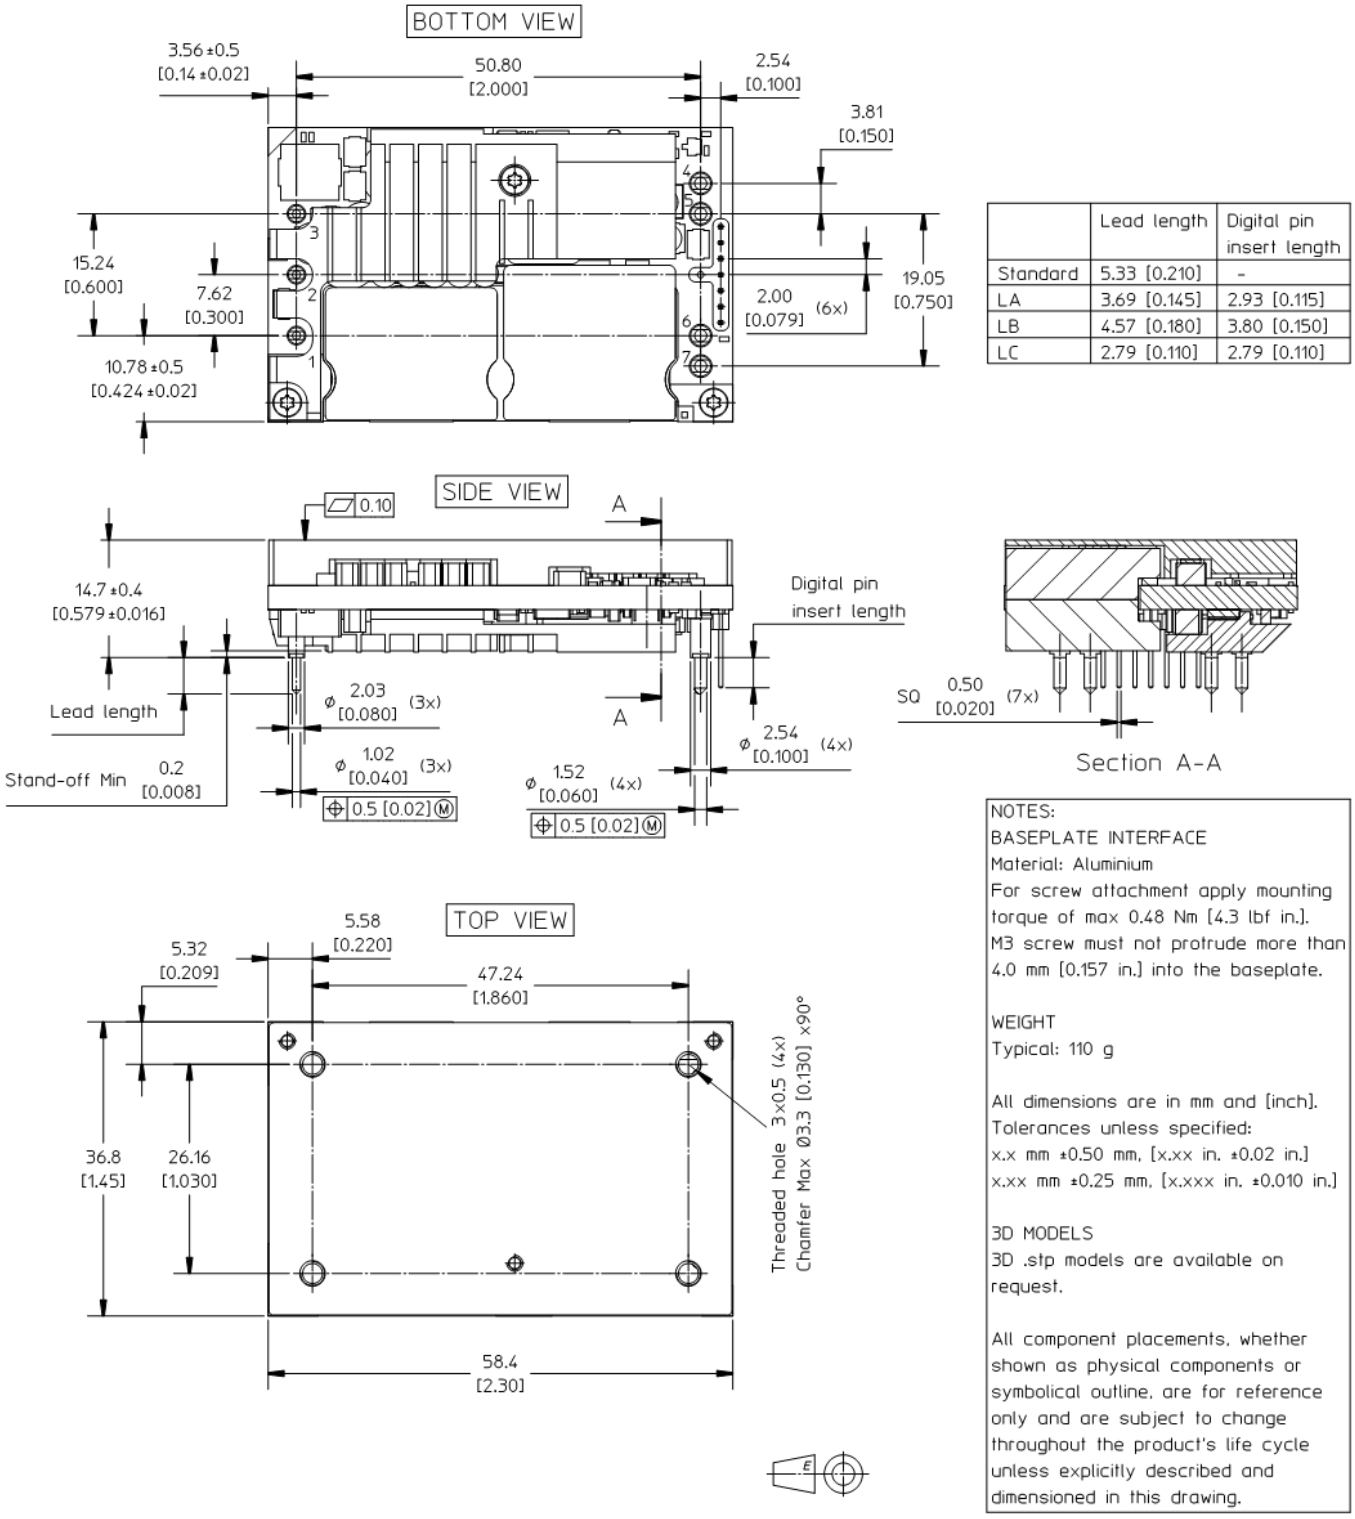

	Lead length	Digital pin insert length
Standard	5.33 [0.210]	-
LA	3.69 [0.145]	2.93 [0.115]
LB	4.57 [0.180]	3.80 [0.150]
LC	2.79 [0.110]	2.79 [0.110]

NOTES:
BASEPLATE INTERFACE
Material: Aluminium
For screw attachment apply mounting torque of max 0.48 Nm [4.3 lbf in.]. M3 screw must not protrude more than 4.0 mm [0.157 in.] into the baseplate.

WEIGHT
Typical: 110 g

All dimensions are in mm and [inch].
Tolerances unless specified:
x.x mm ±0.50 mm, [x.xx in. ±0.02 in.]
x.xx mm ±0.25 mm, [x.xxx in. ±0.010 in.]

3D MODELS
3D .stp models are available on request.

All component placements, whether shown as physical components or symbolical outline, are for reference only and are subject to change throughout the product's life cycle unless explicitly described and dimensioned in this drawing.

Footprint and pin positions - BMR351 X2XX/XXX: hole mounted, baseplate version

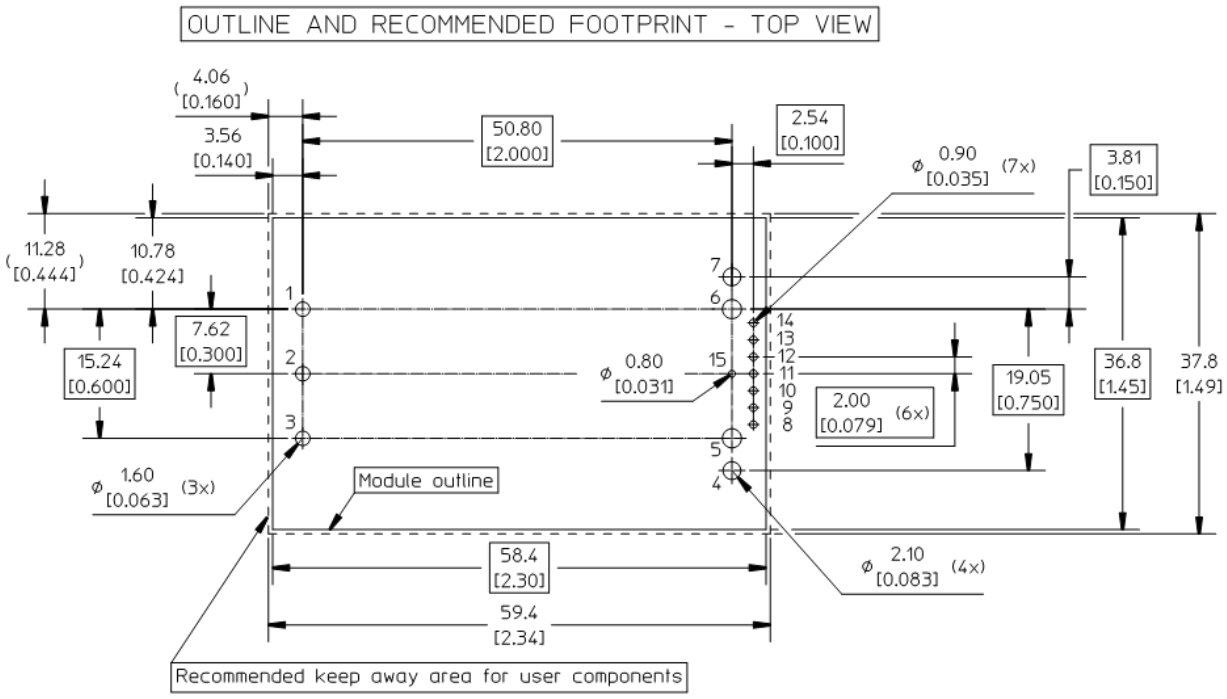

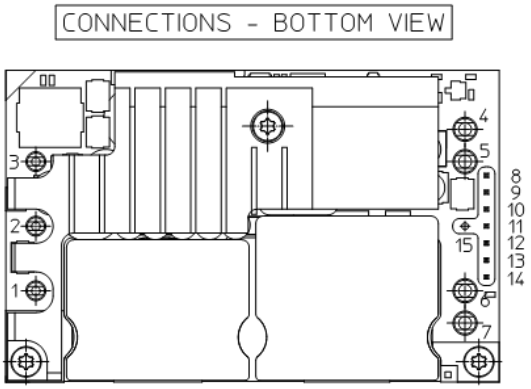

PIN SPECIFICATIONS:

Pin 1-3, 4-7 Material: Copper alloy
Plating: Min Au 0.1 µm over Ni 1-3 µm

Pin 8-14 Material: Brass
Plating: Min Au 0.1 µm over Ni 1-3 µm

Pin 15 Not mounted (Option)

Pin	Desig-nation	Function PCB pins
1	+In	Positive Input
2	RC	Remote Control
3	-In	Negative Input
4	-Out	Negative Output
5	-Out	Negative Output
6	+Out	Positive Output
7	+Out	Positive Output

Pin	Desig-nation	Function 7 pin Connector
8	PG	Power Good
9	SENSE -	Remote Sense -
10	SDA	PMBus Data
11	SALERT	PMBus alert signal
12	SCL	PMBus Clock
13	SA1	PMBus Address 1
14	SENSE +	Remote Sense +

BMR351 X0XX/XXX: Hole mounted, Open frame version

The mechanical information is based on a module which is hole mounted and without baseplate.

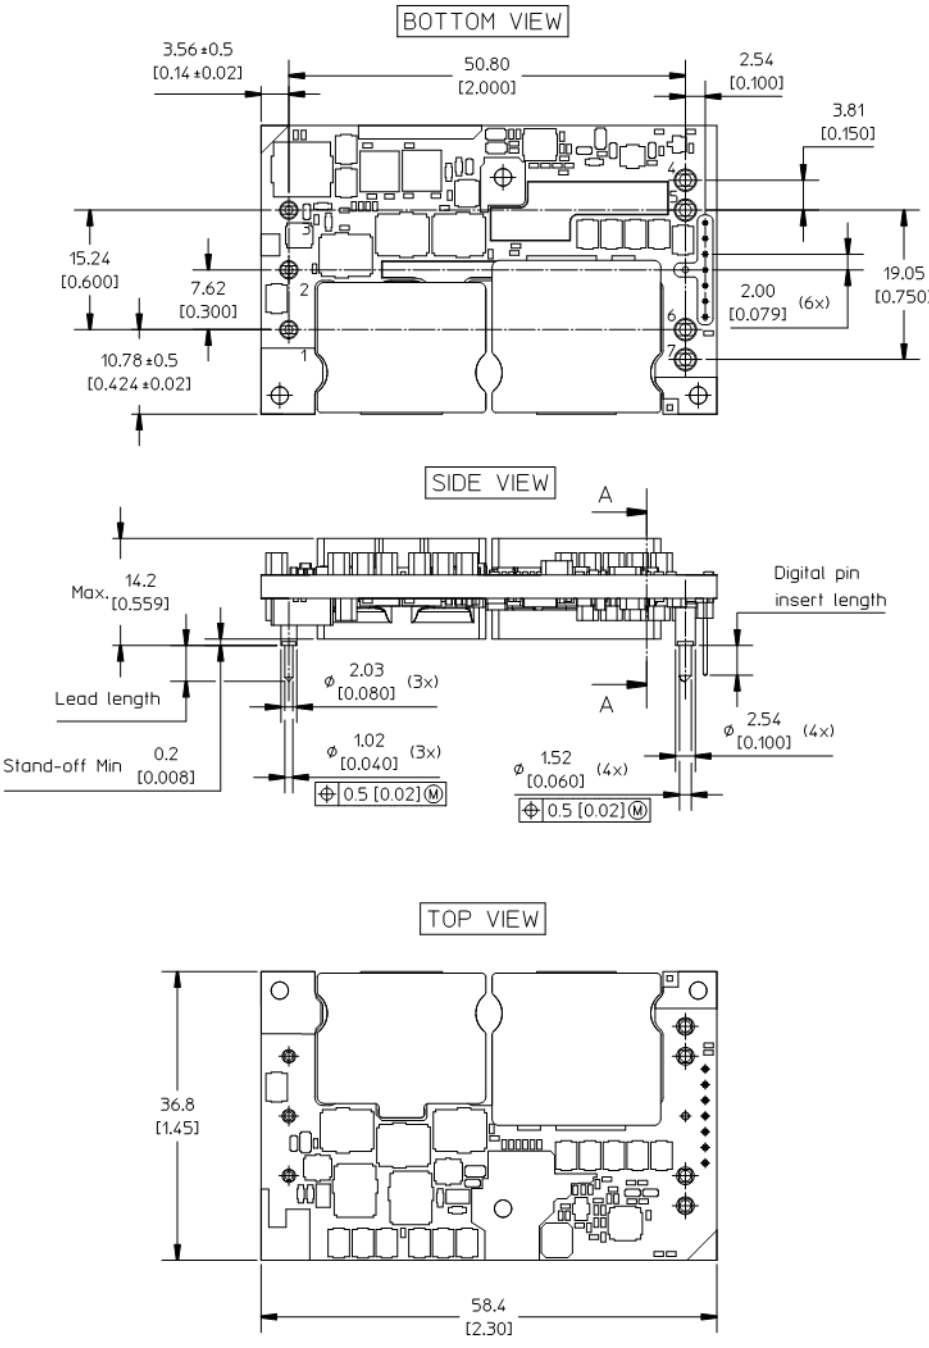

	Lead length	Digital pin insert length
Standard	5.33 [0.210]	-
LA	3.69 [0.145]	2.93 [0.115]
LB	4.57 [0.180]	3.80 [0.150]
LC	2.79 [0.110]	-



Section A-A

NOTES:
WEIGHT: Typical: 82 g

All dimensions are in mm and [inch].
Tolerances unless specified:
x.x mm ±0.50 mm, [x.xx in. ±0.02 in.]
x.xx mm ±0.25 mm, [x.xxx in. ±0.010 in.]

3D MODELS
3D .stp models are available on request.

All component placements, whether shown as physical components or symbolical outline, are for reference only and are subject to change throughout the product's life cycle unless explicitly described and dimensioned in this drawing.

Footprint and pin positions - BMR351 X0XX/XXX: Hole mounted, Open frame version

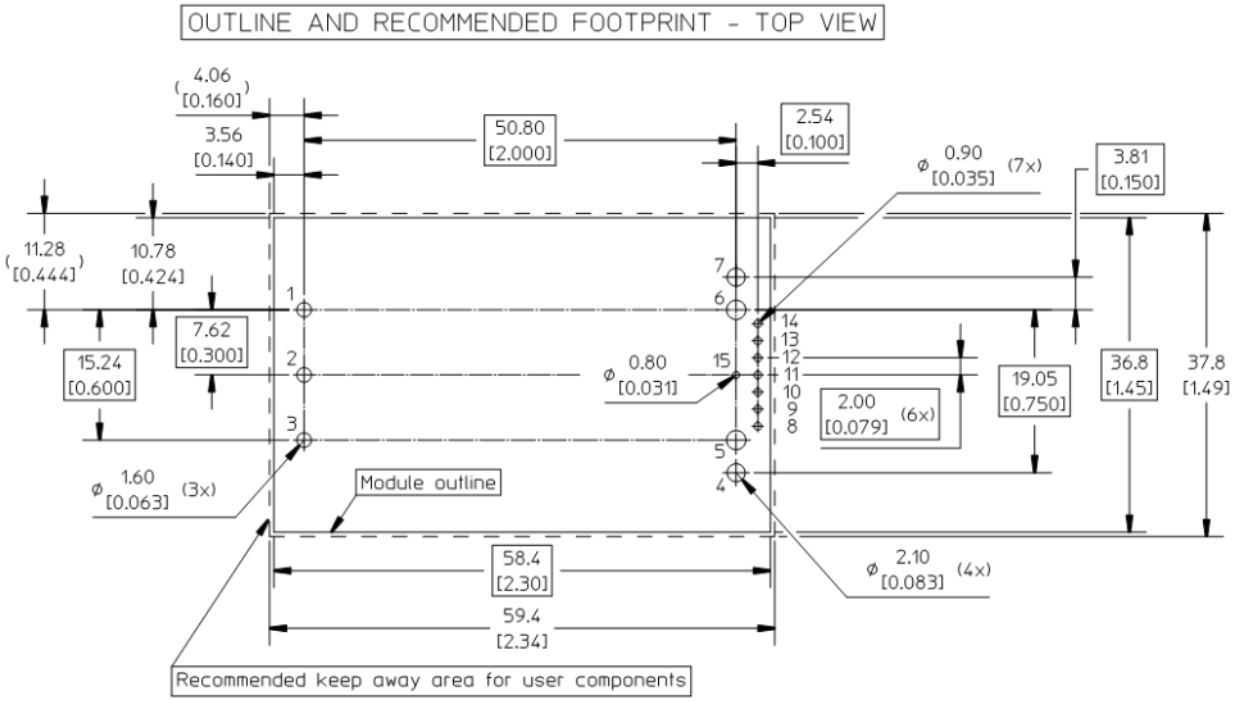

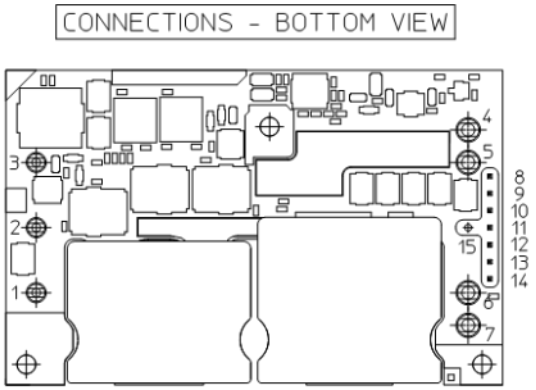

PIN SPECIFICATIONS:

Pin 1-3, 4-7 Material: Copper alloy
Plating: Min Au 0.1 µm over Ni 1-3 µm

Pin 8-14 Material: Brass
Plating: Min Au 0.1 µm over Ni 1-3 µm

Pin 15 Not mounted (Option)

Pin	Desig-nation	Function PCB pins
1	+In	Positive Input
2	RC	Remote Control
3	-In	Negative Input
4	-Out	Negative Output
5	-Out	Negative Output
6	+Out	Positive Output
7	+Out	Positive Output

Pin	Desig-nation	Function 7 pin Connector
8	PG	Power Good
9	SENSE -	Remote Sense -
10	SDA	PMBus Data
11	SALERT	PMBus alert signal
12	SCL	PMBus Clock
13	SA1	PMBus Address 1
14	SENSE +	Remote Sense +

Part 4: Thermal considerations

Thermal considerations

The products are designed to operate in different thermal environments and sufficient cooling must be provided to ensure reliable operation.

General

For products mounted on a PWB without a heatsink attached, cooling is achieved mainly by conduction, from the pins to the host board, and convection, which is dependent on the airflow across the product. Increased airflow enhances the cooling of the product. The wind speed and temperature are measured in a point upstream the device. The *output current derating graphs* found later in this section for each model provide the available output current vs. ambient air temperature and air velocity at V_{in} = 54 V.

For products using any form of heatsink structure a top spacing board and side airflow guides are used to ensure airflow hitting the module and not diverted away.

Distance between the tested device and the top space board and the side airflow guides are 6.35 mm ± 1 mm.

The product is tested on a 185 x 185 mm, 105 µm (3 oz), 6-layer test board mounted vertically in a wind tunnel.

For products with baseplate used in a sealed box/cold wall application, cooling is achieved mainly by conduction through the cold wall. The product is tested in a sealed box test set up with ambient temperatures 85°C. See Design Note 028 for further details.

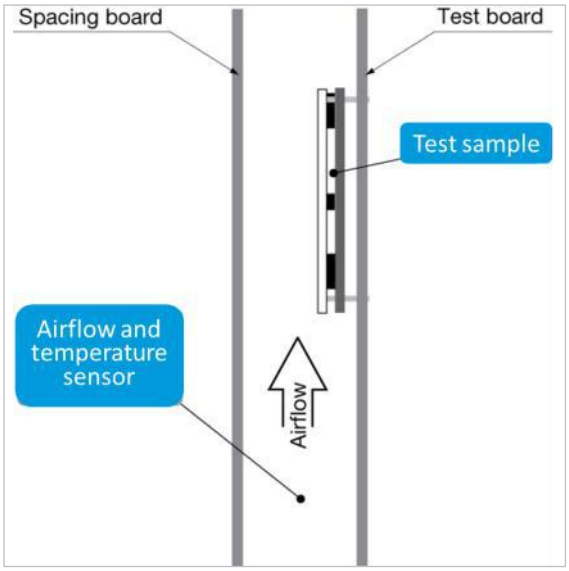

Picture: general test set-up

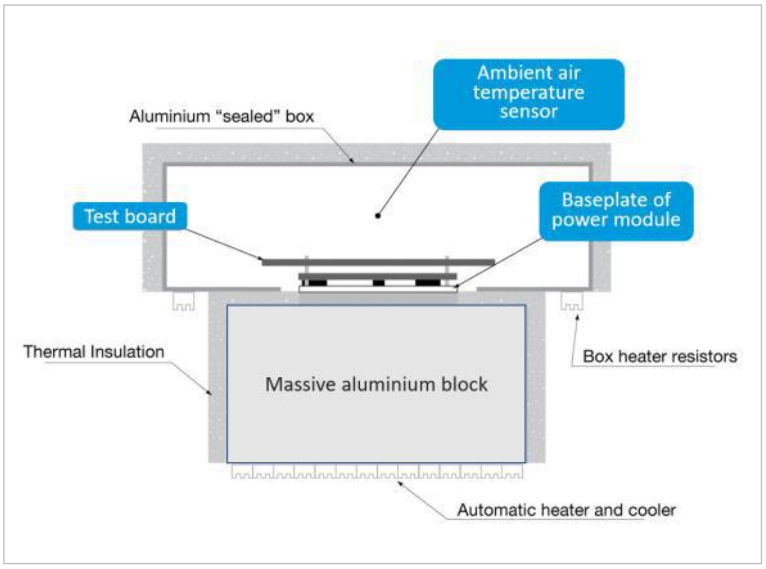

Picture: cold wall test set-up

Definition of product operating temperature

Proper thermal conditions can be verified by measuring the temperature at position P1 as shown below. The temperature at this position (T_{P1}) should not exceed the maximum temperatures in the table below. The number of measurement points may vary with different thermal design and topology. Temperatures above maximum T_{P1}, measured at the reference point P1 are not allowed and may cause permanent damage. *See Note 1.*

Position	Description	Max. Temp.
P1	PWB reference point	T_{P1}= 125°C

Bottom view with heat sink

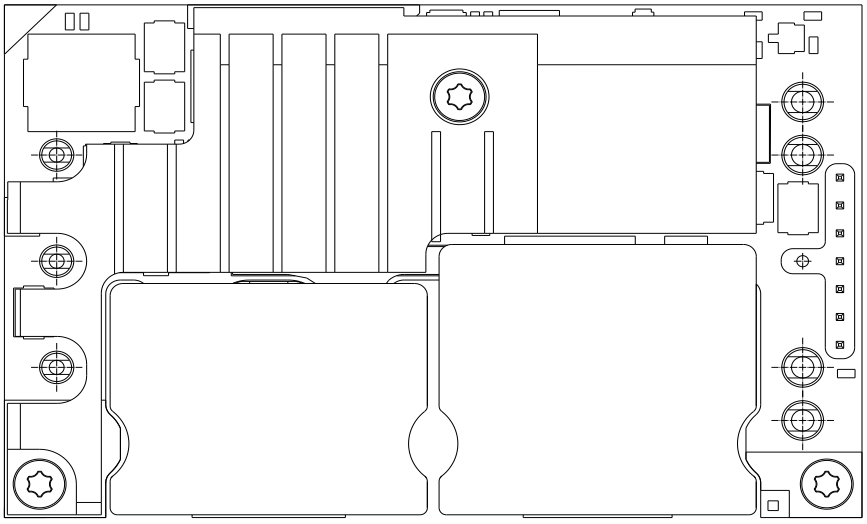

Bottom view without heat sink

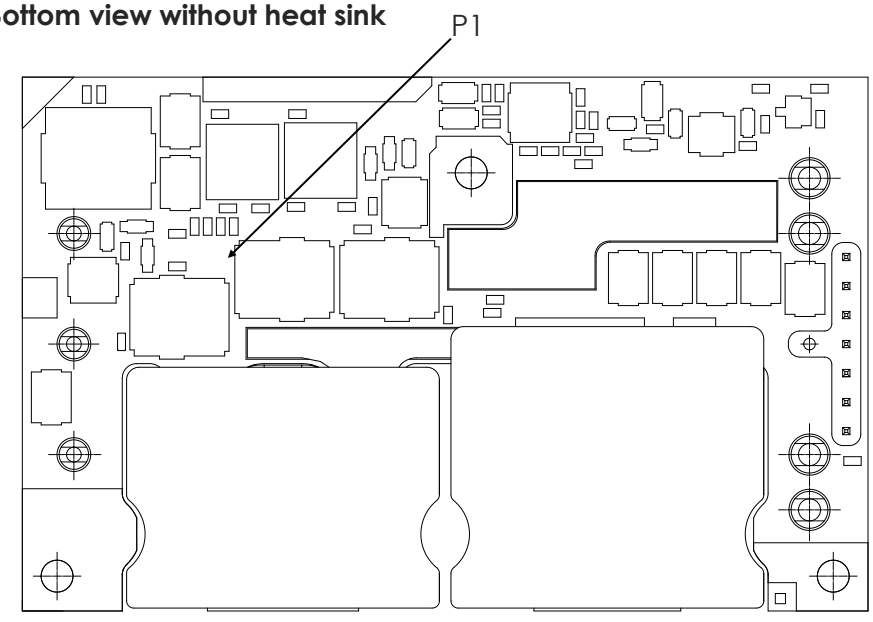

Note 1: Heat sink needs to be unscrewed in order to attach thermal probe to the component lead.

Thermal graphs

Output power derating - 1.0 inch heatsink

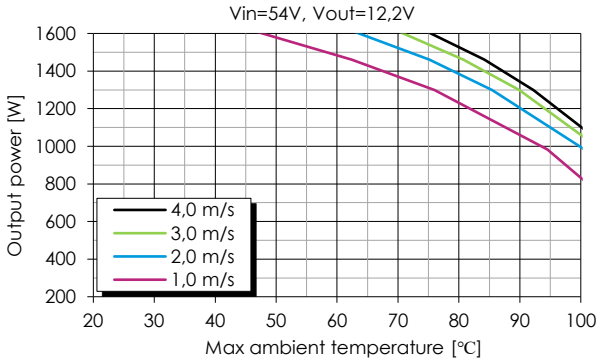

Available output power vs. ambient air temperature and airflow. Airflow Direction -IN to +IN.

Output power derating - 0.5 inch heatsink

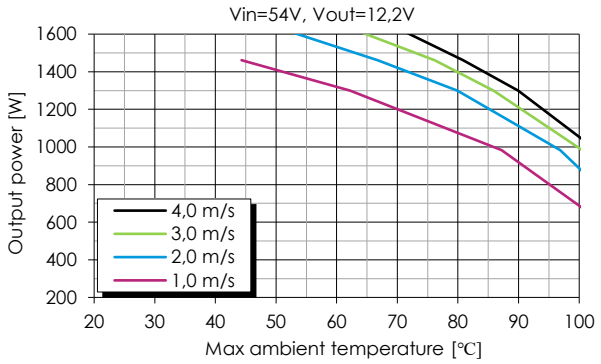

Available output power vs. ambient air temperature and airflow. Airflow Direction -IN to +IN.

Maximum Output Power

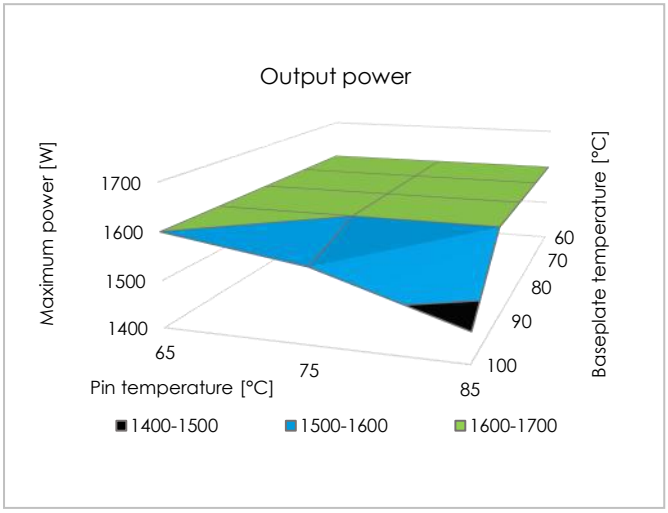

Maximum allowed thermal power (restriction by POMAX might occur).

Maximum Allowed Power Loss

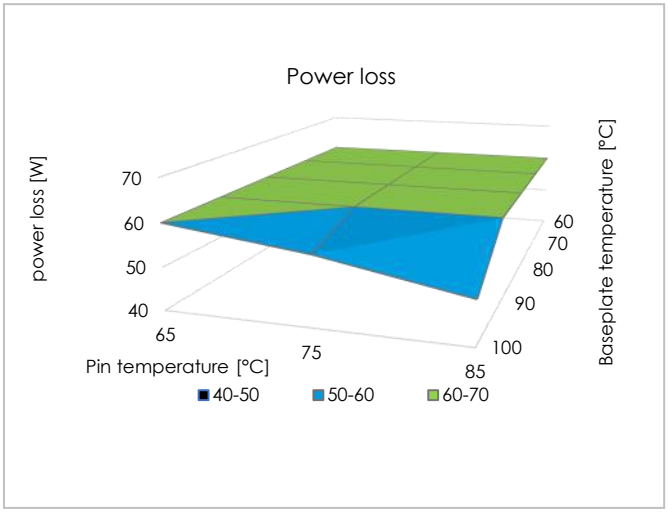

Available output power vs. pin and baseplate temperature. See Thermal Consideration section.

Part 5: Packaging

Packaging information

H option: Select for PIP reflow solder and pick & place - dry packed （Baseplate version)	
Material	Antistatic Polyphenylene Ester (PPE)
Surface resistance	≥ 1 x 10^4 to < 1 x 10^{11} ohms
Bakabilty	Tray can be baked at max. 125 °C for 24 h. Please remove fitment before baking if attached.
Tray capacity	14 converters/tray
Box capacity	42 products (3 full trays/ box)
Tray weight	215 g empty tray, 1800g full tray.

JEDEC standard tray.
All dimensions in mm

Tolerances: X.x ±0.26 [0.01], X.xx ±0.13 [0.005]

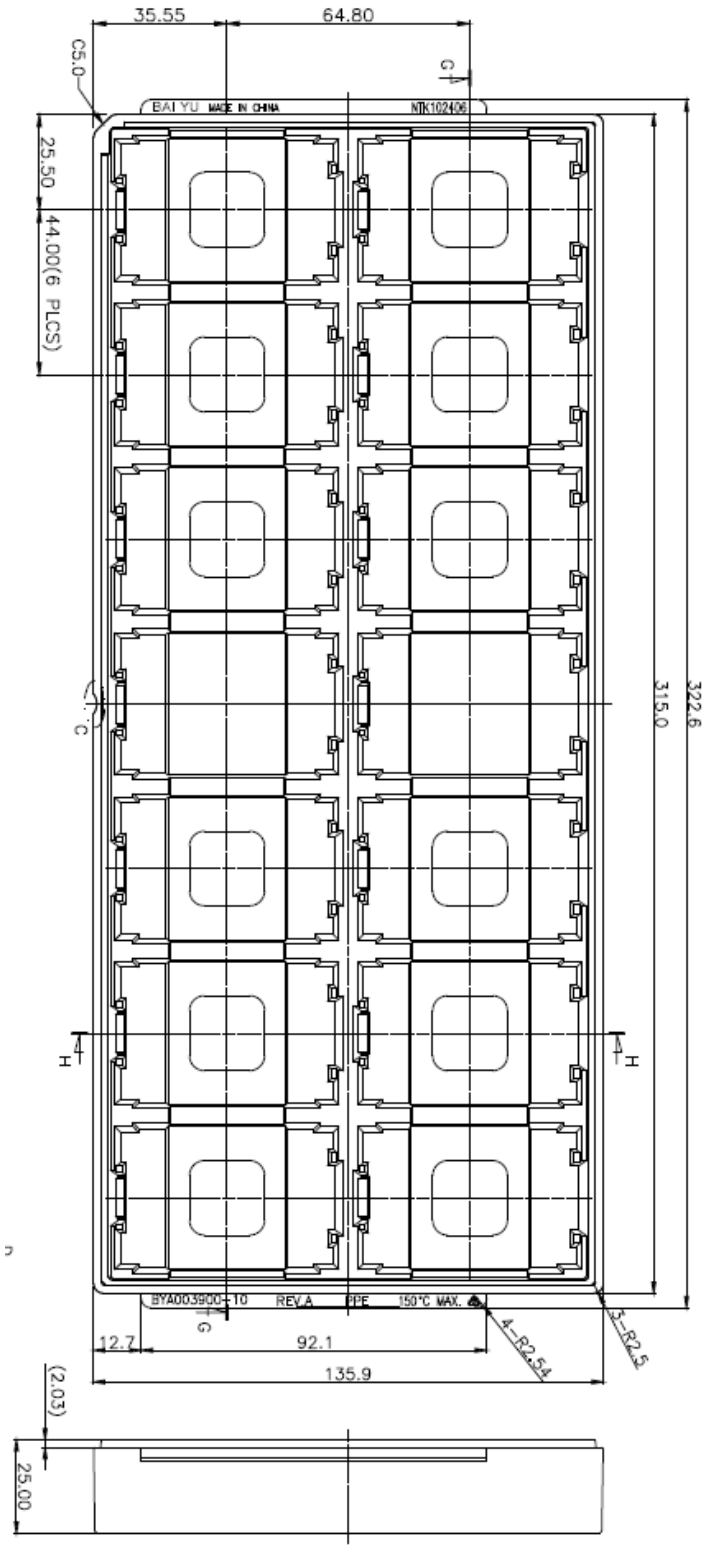

Example hard tray (14 pcs)

Packaging information

E option: Select for PIP reflow solder - dry packed （Open frame version)	
Material	Antistatic Polystyrene (black)
Surface resistance	≥ 1 x 10^4 to < 1 x 10^{11} ohms
Bakabilty	The trays cannot be baked .
Tray capacity	12 converters/tray
Box capacity	48 products (4 full trays/ box)
Tray weight	60 g empty, 1060 g full tray (Open frame)

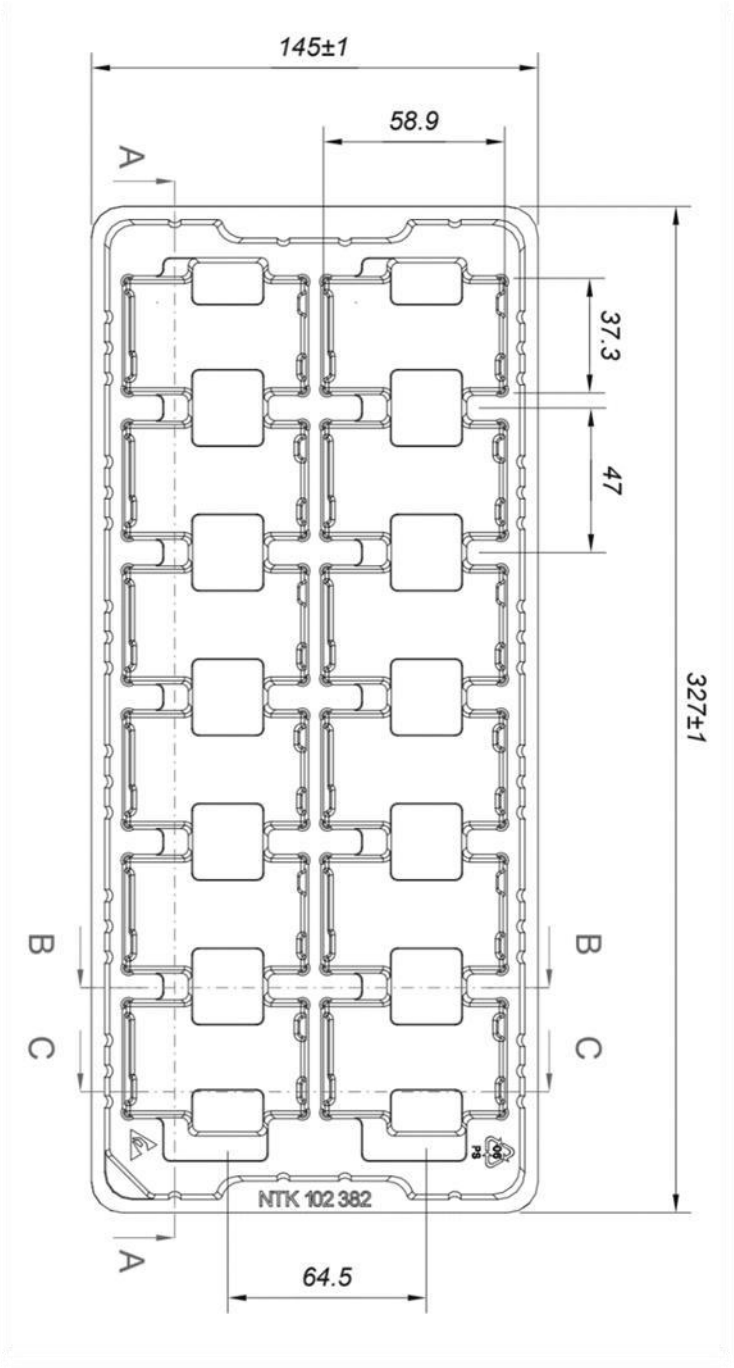

Packaging information

Blank option: Select for wave or hand soldering, NOT dry packed.	
Material	Antistatic Polyethylene (PE) foam
Surface resistance	≥ 1 x 10^4 to < 1 x 10^{11} ohms
Bakabilty	Tray cannot be baked
Tray capacity	20 converters / tray
Box capacity	60 products (3 full trays/ box)
Weight	48 g empty tray, 2248 g full tray.

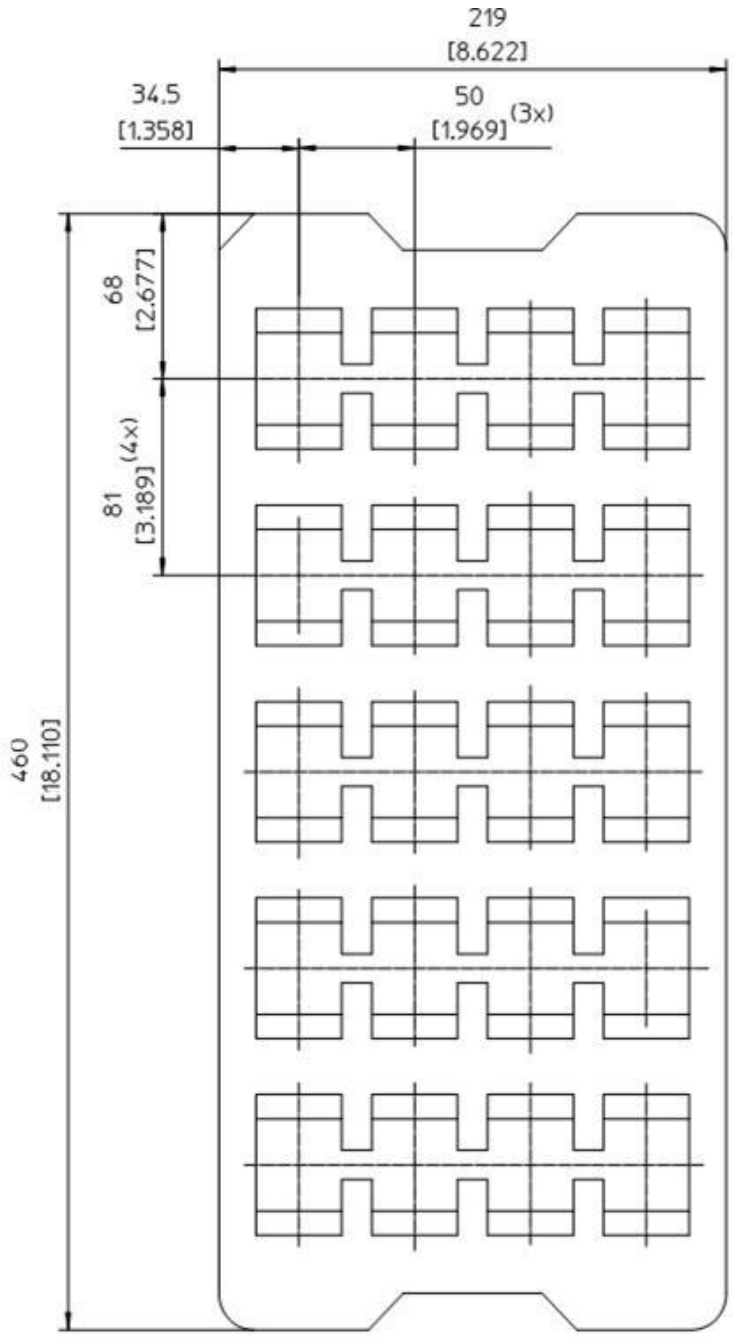

Example PE foam tray

Part 6: Revision history

Revision table

Revision number	revision change	date	revisor
Rev. A	New TS document	31st of May 2023	karasell
Rev. B	Spellcheck	31st of May 2023	karasell
Rev. C	Add open frame version, mechnical drawing and delivery package	Sep 18th, 2023	jidmawan
Rev. D	1. Modify slow OCP limit and current limit Off Delay 2. Update hard tray spec	Jan 8th, 2024	Jidfrawu jidmawan
Rev. E	Narrow output voltage initial setting	Mar 26th, 2024	jidmawan
Rev. F	Minor formatting updates	2026-02-03	kartwaer

© Flex Power Modules 2024

The information and specifications in this technical specification is believed to be correct at the time of publication. However, no liability is accepted for inaccuracies, printing errors or for any consequences thereof. Flex reserves the right to change the contents of this technical specification at any time without prior notice.

Flex Power Modules, a buiness line of Flex, is a leading manufacturer and solution provider of scalable DC/DC converter primarily serving the data processing, communications, industrial and transportation markets. Offering a wide range of both isolated and non-isolated solutions, its digitally-enabled DC/DC converters include PMBus compatibility supported by the powerful Flex Power Designer.